


Ativando o IR Cut da Camera IP serie AV.

1º PASSO



2º PASSO

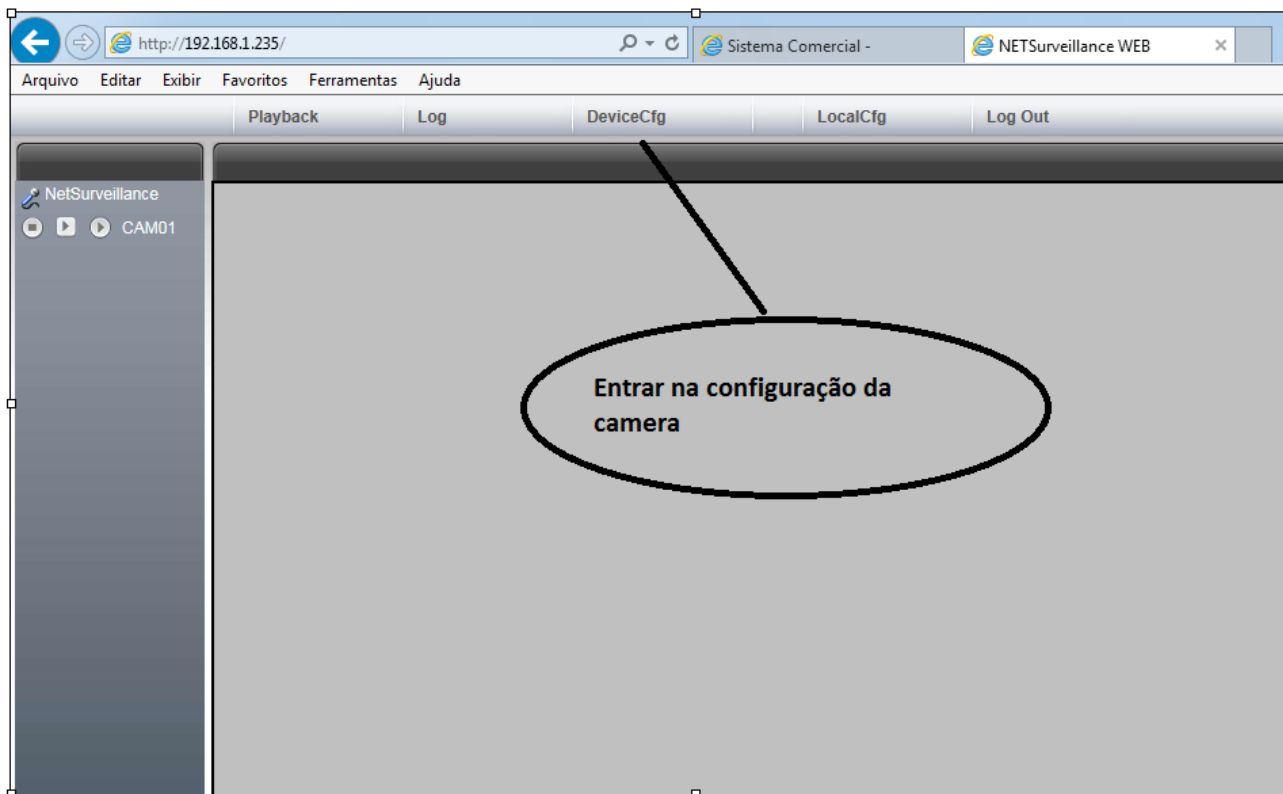

3º PASSO

The image shows a 'Device config' window with the following settings:

- Channel: 1
- Exposure mode: Automatic
- Minimum time: 0.256000
- Maximum time: 65.536000 Millisecond
- Day/Night mode: Automatic
- BLC: Close
- Auto Iris: Close
- Profile: Automatic
- AE Reference: 50
- Defaults: 50
- Dnc Threshold: 30
- DWDR: Close
- Limit: 50
- AE Sensitivity: 5
- Image: Style2
- AGC: Open
- Limit: 50
- Slow shutter: High
- IR_CUT: Automatically Switch
- DayNTLevel: 3
- NightNTLevel: 3
- Front-end comm: [Empty]
- Buttons: Send, Save
- Checkboxes: Mirror, Flip, Anti flicker, IRSwap
- Buttons: Refresh, OK, Cancel

A callout points to the **IRSwap** checkbox, which is checked, with the text **Ativar essa função**.